

BASE electrode cap

Textile cap with preinstalled Ag/AgCl sintered removable MCScap-E electrodes with DB-25M common connector.

REF	Size	Head circumference
003-8-001	XL	60-66 cm
003-8-002	XL/L	57-63 cm
003-8-003	L	54-60 cm
003-8-004	L/M	51-57 cm
003-8-005	M	48-54 cm
003-8-006	M/S	45-51 cm
003-8-007	S	42-48 cm



INTENDED USE

Routine EEG, Research EEG.

SET

- BASE electrode cap,
- EEG starter kit,
- User Manual.

DESCRIPTION


BASE electrode cap is a universal kit of removable Ag/AgCl sintered MCScap-E electrodes with DB-25M common connector and MCScap® textile cap with fixing rings. The electrode cap is designed for non-invasive registration EEG and use of electroencephalographs and other amplifiers biological signals. The electrode cap is a reusable medical device.

Textile cap is made of elastic material, preserving the shape and size. The cap provides the exact position of the electrodes on the head without additional measurements and adjustments. Large holes are provided for ventilation and access to the electrodes and patient's skin. The cap is fixed on the head with the chin or chest belt. The caps are marked according to the 10-10 system. Size identification is carried out by the color of the seam.


MCScap-E is a point Ag/AgCl sintered electrode for EEG recording. MCScap-E is designed for research that requires frequent installation and quick removal of electrodes for cleaning and disinfection. Used with MCScap textile caps with retaining rings. The Ag / AgCl sintered electrode material guarantees minimum polarization and long-term signal stability, as well as an increased electrode life.



SPECIFICATION


Electrode	 MCScap-E
Material of electrode conductive surface	Ag/AgCl sintered
Electrode body material	polyurethane
Square of electrode conductive surface	4 mm ²
Internal diameter of the electrode at the point of contact of the electrode contact substance with the skin	8 mm
Surface area of contact of the electrode substance with the skin	50.2 mm ²
Outer diameter of the electrode at the point of contact with the skin	15.8 mm
Distance from the skin to the electrode conductive surface	0.7 mm
The diameter of the hole in the electrode to add gel	2.8 mm
Electrode polarization	≤ 50 mV
Resistance of electrodes insulation	≥ 1000 MΩ
Dielectric strength of electrodes insulation	1500 V
The impedance of the electrode	≤ 5 kΩ
Number of electrodes / channels	21 / 20
Electrode positions	Fp1, Fp2, F3, F4, C3, C4, P3, P4, O1, O2, F7, F8, T7(T3), T8(T4), P7(T5), P8 (T6), Cz, Fz, Pz, GND, Ref
Connector type	DB-25M
Cable length	1.5 m
Location of the output of the electrode cable from the cap	back of the head
Ear electrodes	no
Marking of the textile cap	yes
Marking of the electrodes	yes
Weight of EEG cap	< 350 g
Net weight	< 850 g
Gross weight	< 900 g

PIN LAYOUTS OF COMMON CONNECTOR

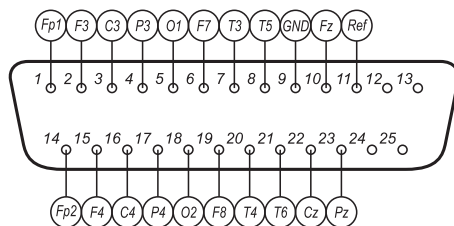

#23-01 (21 electrodes)

SCHEME OF ELECTRODE ARRANGEMENT

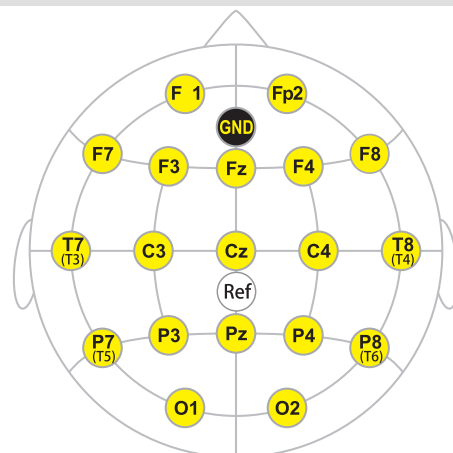

Manufacturer's code: 23M21 (21 electrodes)

For information about other possible EEG electrode arrays, contact the manufacturer.

