


DATA SHEET

## TP2DB25 adapter

Adapter for connecting up to 25 electrodes, including GND with a TouchProof 1.5 mm connector to an amplifier with a DB-25F connector.

**REF**

003-6-003

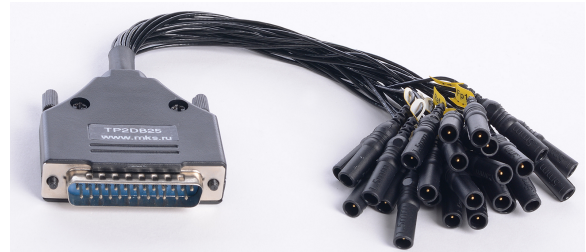

**SET**

- TP2DB25 adapter.

**DESCRIPTION**

TP2DB25 adapter is a passive adapter (switch) for connecting electrophysiological electrodes with individual connectors TouchProof 1.5 mm (DIN 42 802-ST) to EEG amplifiers with a common DB-25F connector.


TP2DB25 adapter can be used in cases, when it is necessary operative disconnection or connection mounted on the patient electrodes to the amplifier, for example, during registration somnograms.

20 adapter connectors are labeled in accordance with the international system 10-20 and are designed to connect standard lead electrodes. Connectors 11, 12, 13, 24, 25 can be used for arbitrary connection of additional electrodes.

**SPECIFICATION**

|   |  |
|---|--|
| Connector 1 type (to cap)               | up to 25 TouchProof 1.5 mm (DIN 42 802-BU) |
| Connector 2 type (to amplifier)         | DB-25M                                     |
| Maximum number of electrodes to connect | 25   |
| Adapter / Extension length              | 0.3 ± 0.02 m                               |
| Net weight                              | < 75 g                                     |
| Gross weight                            | < 80 g                                     |

**PIN LAYOUTS OF COMMON CONNECTOR**

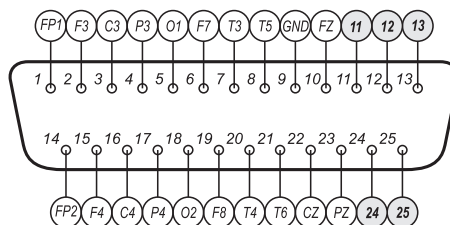

Manufacturer's code: 54-01M25

For information about other possible pin layouts, contact the manufacturer